

# Natural Gas Generator Set Data Sheet (2018-08-01)



**Rated 100kWel, Natural Gas**

<b>Gas Generator Set Model:</b>	TMN125G	<b>Gas Engine Model:</b>	E0836 LE302	<b>Alternator Model:</b>	Leroy Somer LSA44.3 M6
---------------------------------	---------	--------------------------	-------------	--------------------------	------------------------

<b>50Hz</b> 1500 r.p.m	<b>3 Phase</b> 4 Wires	<b>Power Factor:</b> Cos $\phi$ = 0.8	<b>Emissions Standard</b>	N/A
---------------------------	---------------------------	--	---------------------------	-----

RATINGS	Prime Power		Standby Power		Rated Current (A)	Remarks
	(PRP)		(LTP)			
Voltage (V)	kW	kVA	kW	kVA	Amps	
380/220	100	125	N/A	N/A	189.9	
<b>400/230</b>	<b>100</b>	125	<b>N/A</b>	<b>N/A</b>	180.4	
415/240	100	125	N/A	N/A	173.9	
440/254	100	125	N/A	N/A	164.0	

## Conditions and Defintions:

1) Engine output data under ISO8528/1, ISO3046/1, BS5541/1, DIN6271 conditions.

## Genset General Specifications

Gas genset model	TMN125G	Frequency (Hz)	50
Gas engine model	E0836 LE302	Speed (rpm)	1500
Electrical output (kW)	100	Speed regulating rate	0-5% Adjustable
Electrical output (kVA)	125	Open type dimension (L×W×H) (mm)	2100*1100*1400
Fuel	Natural gas	Net weight (kg)	1800

## Engine Specifications

Manufacturer	MAN	Direction of rotation	Counter clockwise from flywheel
Model	E0836 LE302	Induction system	Turbocharged & Intercooled
Mechanical power	110 kWm	Combustion type	Spark ignition
Speed	1500 rpm	Cooling method	Water cooled
Configuration	In line	Ignition & Speed governor	Motortech
Number of cylinders	6	Oil Consumption	0.125kg/h
Cycle	4 stroke	Coolant filling quantity	16 L
Cylinder type	Wet	Oil capacity	34 L
Bore / Stroke	108/125 mm	Heat consumption 100% load	9.1MJ/kW.H
Displacement	6.87 L	Starting method	24V DC motor
Compression ratio	11:1		

**Tide Power Technology Co., Ltd.** NO.1 Building, YiXu Mechanical & Electrical Park, Gaishan Town, Cangshan District, Fuzhou, Fujian, China. Our Tel.: 86-591-28068999, Fax.: 86-591-28068900 (www.tpshk.com - learn more)

## Alternator Specifications

50HZ/1500R.P.M

Manufacture / Brand	Leroy-Somer	Prime output power	100kW/125kVA
Model	LSA44.3 M6	Insulation class	H
AVR model	R250	Voltage regulation	± 0,5 %
Coupling / Bearing	Direct /Single bearing	Totale harmonic distortion THD	no load < 2% - on load < 5%
Phase	3 Phase	Wave form : NEMA = TIF - (*)	< 50
Power factor	Cos $\phi$ = 0.8	Number of wires	12
Winding pitch - code	2/3 - (N° 6S)	Altitude	≤ 1000 m
Drip proof	IP 23	Overspeed	2250 min <sup>-1</sup>
Excitation	Shunt	Air flow	0.25 m <sup>3</sup> /s

## Control Pannel---Motortech Control System

Gen-set controller for single or multiple generating sets operating in standby or parallel modes

Support of engines with ECU (Electronic Control Unit)

Many communication options – easy remote supervising and servicing

Gen-set performance log for easy problem tracing

Automatic synchronizing and power control (via speed governor or ECU)

AMF function, Baseload, Import / Export, Peak shaving, Voltage and PF control (AVR)

Generator measurement, Mains measurement

Controller redundancy

Integrated PLC programmable functions

## Standard Features

- High efficient water cooled gas engine with radiator
- Brushless alternators (Class H, with AVR.)
- Heavy duty rubber anti-vibration mountings
- Starter batteries and connecting cables
- Separate engine-drive battery charging alternator
- Industrial silencer for open type generator sets
- Circuit breaker - 3 pole (MCCB)
- Low coolant level sensor
- Oil filter - Air filter
- Fully welded steel baseframe
- Ignition system
- Gas train: mainly Italy Madas gas pressure regulator & gas filter, pressure gauge,electromagnetic valve and fire arrestor and other connection components
- Wiring with IEC standard
- Factory test certificate
- Operation & Maintenance manual & Diagrams
- Worldwide product / Technical support


## Optional

- Automatic Transfer Switch (ATS)
- Canopy/Enclosure
- Water heater for severe cold weather
- Lub-oil heater for severe cold weather
- Silent containerised
- Residential silencer
- Panel for auto synchronization with Mains
- Extra air filters for time-maintenance
- Automatic oil supply system
- Extra oil filters for time-maintenance
- Parallel cabinet
- Full range of attachments and options available for alternator
- Flame arrestor in gas train
- Desulfurization system
- Gas pretreatment system
- Dehydration system
- Genset Comissioning / Testing on site

**Tide Power Technology Co., Ltd.** NO.1 Building, YiXu Mechanical & Electrical Park, Gaishan Town, Cangshan District, Fuzhou, Fujian, China. Our Tel.: 86-591-28068999, Fax.: 86-591-28068900 (www.tpshk.com - learn more)

## Combined Heat and Power Systems ( Optional )

---

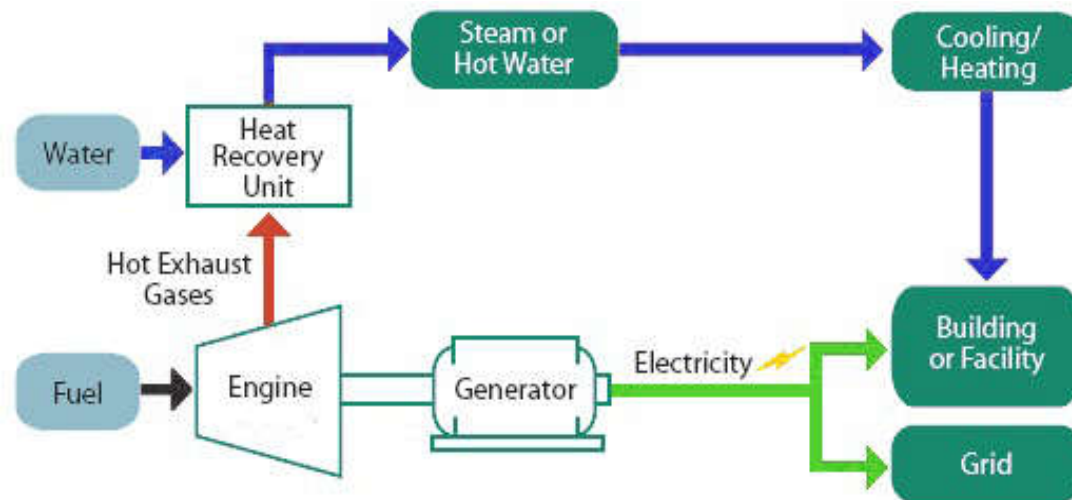

We offer Combined Cooling Heating and Power (CHP and CCHP ) packages for our gas generator sets. It can recover 75%-90% combined electrical and thermal efficiency, resulting in major reductions in your overall energy costs. In the past years we have supplied CHP systems to Germany, Russia,Indonesia etc. We have the experience and capabilities to meet your total energy requirements.

## Warranty

---

The goods of Tide Power Technology are under warranty against defects in materials and workmanship for period 1 year or 8000 hours operation time whichever come first from the date of delivery to the end user (except the damageable spare parts of genset caused by incorrect man-made operation), and that the aforementioned warranty for the same token is back up by the engine & alternator manufactures and their global distributors.